



Procedure No: CS-OHS-75  
TRIM Ref No: B/D/17/17210  
Reviewed: 12/18  
Amended: 12/18  
Review Due: 12/20

## CS ENERGY PROCEDURE

# HEALTH HAZARD EXPOSURE MANAGEMENT CS-OHS-75

Responsible Officer: Health and Safety Specialist  
Responsible Manager: Head of Health and Safety  
Responsible Executive: Executive General Manager Plant Operations

---

### DOCUMENT HISTORY

Key Changes	Prepared By	Checked By	Approved By	Date
Original Release	H Lonsdale N Seibel	A Cashin B Pike D Clarke G Wellings (GCG)	S Faulkner	02/11/2018



## CONTENTS

<b>DOCUMENT HISTORY</b> .....	<b>1</b>
<b>1 PURPOSE</b> .....	<b>4</b>
<b>2 SCOPE</b> .....	<b>4</b>
<b>3 RESPONSIBILITIES AND ACCOUNTABILITIES</b> .....	<b>5</b>
<b>3.1 Management</b> .....	<b>5</b>
<b>3.2 Health and Safety Specialist</b> .....	<b>5</b>
<b>3.3 Health and Safety Business Partners</b> .....	<b>5</b>
<b>3.4 Supervisors</b> .....	<b>5</b>
<b>3.5 Workers</b> .....	<b>6</b>
<b>4 HAZARD IDENTIFICATION</b> .....	<b>6</b>
<b>4.1 Determine site and hazard characteristics</b> .....	<b>6</b>
<b>4.2 Similar Exposure Groups (SEGs)</b> .....	<b>6</b>
<b>5 RISK ANALYSIS</b> .....	<b>6</b>
<b>5.1 Identify exposure sources and causes</b> .....	<b>6</b>
5.1.1 Qualitative Health Risk Assessment .....	7
5.1.2 Quantitative Health Risk Assessment .....	7
<b>5.2 Exposure Monitoring</b> .....	<b>7</b>
5.2.1 Baseline Monitoring .....	8
5.2.2 Requirement for ongoing monitoring .....	8
<b>6 RISK REDUCTION</b> .....	<b>9</b>
<b>6.1 Identify and select exposure controls</b> .....	<b>9</b>
<b>6.2 Establish exposure control plans</b> .....	<b>9</b>
<b>6.3 Implement controls</b> .....	<b>9</b>
<b>7 RISK MONITORING</b> .....	<b>9</b>
<b>7.1 Periodically monitor exposure levels</b> .....	<b>9</b>
<b>7.2 Investigate Exceedances</b> .....	<b>9</b>
<b>7.3 Review and audit exposure control plans</b> .....	<b>10</b>
<b>7.4 Monitor the health of employees</b> .....	<b>10</b>
<b>7.5 Report and communicate exposure data</b> .....	<b>10</b>
<b>8 DEFINITIONS</b> .....	<b>11</b>
<b>9 REFERENCES</b> .....	<b>12</b>
<b>10 RECORDS MANAGEMENT</b> .....	<b>12</b>
<b>11 ATTACHMENTS</b> .....	<b>13</b>

<b>11.1 Attachment 1 – Similar Exposure Groups (SEGs)</b> .....	<b>13</b>
<b>11.2 Attachment 2 – Occupational Exposure Limit Table</b> .....	<b>17</b>
<b>11.3 Attachment 3 – Guidance for management and control of identified health hazards</b>	<b>19</b>
11.3.1 Ammonia .....	19
11.3.2 Asbestos.....	19
11.3.3 Biological Agents (Legionella).....	21
11.3.4 Chlorine .....	22
11.3.5 Community Acquired Infectious Diseases .....	23
11.3.6 Crystalline Silica .....	23
11.3.7 Ergonomics .....	24
11.3.8 Fatigue .....	25
11.3.9 Hand Arm Vibration.....	26
11.3.10 Hazardous Substances (other) .....	27
11.3.11 Herbicides .....	28
11.3.12 Inhalable Dust .....	28
11.3.13 Ionising Radiation.....	30
11.3.14 Isocyanates .....	31
11.3.15 Lighting.....	32
11.3.16 Mould.....	32
11.3.17 Nitrogen Dioxide.....	33
11.3.18 Noise .....	34
11.3.19 Refined Hydrocarbons .....	35
11.3.20 Respirable Dust.....	36
11.3.21 Sulphuric Acid and Mist.....	37
11.3.22 Synthetic Mineral Fibres.....	38
11.3.23 Thermal Stress .....	39
11.3.24 Ultraviolet (UV) Radiation.....	40
11.3.25 Volatile Organic Compounds (VOCs) .....	40
11.3.26 Welding and Metal Fumes .....	41
11.3.27 Whole Body Vibration.....	42

## 1 PURPOSE

Exposure to substances or environmental conditions in the workplace can pose health risks to workers. The extent to which a person is exposed depends on the concentration of a substance, the amount of time they are exposed to a condition and the effectiveness of controls. Exposures may cause immediate acute health effects, or it may be decades before effects become evident.

This procedure describes the process for health hazard exposure management at CS Energy.

## 2 SCOPE

The procedure applies to all activities undertaken at CS Energy and all people exposed to potential health hazards.

Hygiene risks are to be understood and managed at all sites. The framework in Figure 1 describes the various process steps involved and the related activities for each step.

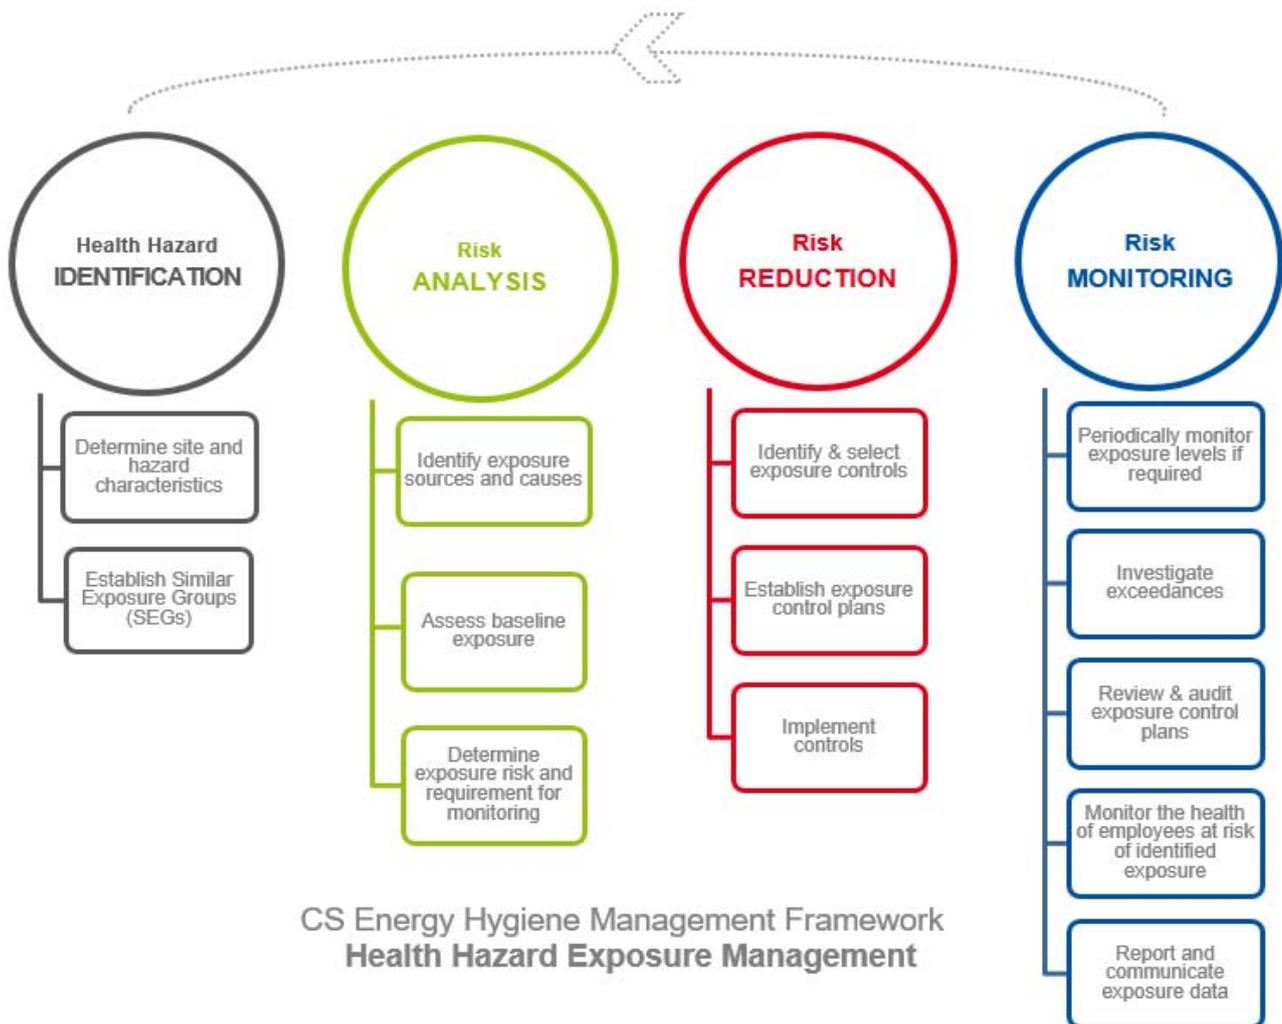


Figure 1

### **3 RESPONSIBILITIES AND ACCOUNTABILITIES**

#### **3.1 Management**

Management are responsible for ensuring that:

- This procedure is followed and that adequate resources are available to ensure effective hygiene management
- They are well informed about issues identified with hygiene management
- Hygiene risk assessments are completed in relevant work areas
- Exposure testing and health monitoring is conducted for identified hygiene risks
- Areas which are known hygiene hazards are signposted as required.

#### **3.2 Health and Safety Specialist**

The Health and Safety Specialist is responsible for ensuring that:

- A program is implemented for exposure monitoring as identified by risk assessment and legislative requirements
- Specialist advice is obtained regarding exposure assessments and health surveillance
- Health surveillance requirements are identified, and a program coordinated
- An annual review of the hygiene monitoring program is completed
- Education and awareness programs are developed and delivered for significant hazards identified by the hygiene risk assessments.

#### **3.3 Health and Safety Business Partners**

The Health and Safety Business Partners are responsible for ensuring that:

- Risk assessments are coordinated for all likely hygiene risks and monitoring is conducted as required
- Where required, technical advice is sought for hygiene risks on site
- Exposure monitoring is conducted in compliance with the schedule
- Management is assisted with the development of control plans to reduce exposure
- Health surveillance is conducted in compliance with the schedule.

#### **3.4 Supervisors**

Supervisors are responsible for ensuring that:

- Adequate resources are allocated for compliance to this procedure within their area of responsibility
- Hygiene risks are understood and managed within their area of responsibility
- Workers understand their role in this procedure.

### 3.5 Workers

Workers are responsible for ensuring that:

- They comply with the requests to participate in occupational hygiene monitoring
- They employ controls associated with identified health hazards in their work area
- Identified hygiene hazards are reported to their supervisor and recorded.

## 4 HAZARD IDENTIFICATION

### 4.1 Determine site and hazard characteristics

CS Energy will seek specialist advice in relation to hazardous processes and the level of risk that they may pose to the health of workers. Workers may also identify potential health hazards that need to be risk assessed and these must be raised with a Supervisor or a member of the Health & Safety team.

- The workplace and workforce must be analysed to determine exposure risks. The aim of the characterisation process is to develop an initial profile of the site to assist in occupational hygiene hazard identification, exposure assessment prioritisation and monitoring of employee exposures.
- Consideration should be given to the following:
  - Site description and layout
  - Process and nature of work
  - Workforce considerations (departments, jobs and tasks performed, number of employees, shift rosters).

### 4.2 Similar Exposure Groups (SEGs)

Using the information gathered as part of the characterisation, workers who have the same general exposure to health risks are grouped into Similar Exposure Groups (SEGs).

- SEGs at CS Energy have been determined on each site and are detailed in Attachment 1 – Similar Exposure Groups (SEGs).

## 5 RISK ANALYSIS

### 5.1 Identify exposure sources and causes

Exposure agents must be analysed to determine exposure risks. The resulting analysis is referred to as the Hygiene Risk Assessment (HRA). The HRA can be undertaken via;

- Qualitative exposure assessment, where no or insufficient exposure data exists
- Quantitative exposure assessment, where sufficient data is available (Note: personnel performing such assessments should understand the impact of the sample size, sample variation, effect of outliers in the data set and consistency with knowledge and understanding of the process and activities performed).

Consideration should be given to the following in both qualitative and quantitative HRAs;

- Products, by-products, raw materials, waste streams, process reagents etc
- Emission points

- Nature of emissions
- Potential health effects
- Specific historical exposures.

Exposure risk ratings are assessed against CS Energy's risk matrix – refer Risk Matrix (CS-RISK-01 / CS-RISK-03) - Risk Management Framework (03/15) - CS Energy Registered [B/D/13/17881](#)

### 5.1.1 Qualitative Health Risk Assessment

An observational site inspection should cover all exposure agents and SEGs identified based on the initial site and hazard characterisation and the following factors:

- The types of control measures currently in place and their observed effectiveness
- PPE compliance
- Visual indicators of exposure potential
- Activities conducted
- Worker experiences/perceptions
- Historic exposure/incidents
- Control measures in place

### 5.1.2 Quantitative Health Risk Assessment

The types of quantitative assessment that are used to assess exposures are:

- Baseline exposure assessment
- Ongoing monitoring program
- Campaign exposure assessments

Quantitative assessment of occupational exposures is generally performed where:

- The SEG exposure to an agent is qualitatively assessed as possibly exceeding the 50% of the OEL or other established criteria (estimated exposure risk is significant or high)
- Data analysis of the historic quantitative data identified the SEG exposure to an agent as exceeding 50% of the OEL
- The exposure estimate for a specific contaminant is unclear and requires further characterisation.

## 5.2 Exposure Monitoring

The CS Energy hygiene monitoring schedule is maintained and stored in TRIM.

All monitoring data is to be analysed by a suitably trained and competent person. A third party accredited laboratory i.e. NATA accredited methods are used to analyse monitored samples. Validated Australian Standard methods will be used or equivalent from an internationally recognised standard.

The equipment used for monitoring must be fit for purpose, regularly inspected and calibrated as required for each individual monitoring device.

All records must be retained for minimum period of 30 years.

### 5.2.1 Baseline Monitoring

A baseline sampling program is conducted for new potentially significant exposure activities to establish an exposure profile. The number of samples to be collected for each SEG must be determined to ensure that at least one worker from the sample group will be in the top 20 percent of the exposure occurring in the group to a confidence limit of 90 percent.

- Quantitative exposure assessment must be based on personal monitoring where methods are available. 'Static', fixed-place or area monitoring, is not to be used as a means of defining personal exposures. The exposure assessment must be reported without consideration for the protection provided by any Personal Protective Equipment (PPE) worn during the measurement period.
- In some instances, the conduct of personal monitoring to quantitatively assess exposure may not be applicable (e.g. whole-body vibration, thermal stress) and a 'survey' focused method may need to be employed.

### 5.2.2 Requirement for ongoing monitoring

Following the completion of the Baseline Exposure Assessment and risk analysis, the need for ongoing monitoring is to be assessed. Once the sampling required for a SEG has been identified and the desired number of samples determined, a monitoring schedule is developed.

A monitoring program is to be conducted when;

- A qualitative or quantitative exposure profile assessment identifies a SEG's exposure to an agent as exceeding 50% of the OEL or other established criteria.
- The exposure estimate for a specific contaminant is unclear and requires further characterisation.

Note: The main Occupational Exposure Limits (OELs) for the CS Energy risks identified at CS Energy facilities are listed in Attachment 2 – Occupational Exposure Limit Table.

Additional Occupational Exposure Limits (OEL's) shall as a minimum be those documented in <http://hsis.safeworkaustralia.gov.au/ExposureStandards>.

In the absence of an appropriate Safework occupational exposure limit, a comparable regulatory authority / advisory body must be sourced to determine occupational exposure limits.

OELs are based on an 8-hour day, 5 day working week. Exposure standards may need to be adjusted depending on different shift arrangements to ensure workers maintain the levels of controls adequate for an individual. Shift adjustments will be made in accordance with the IRSST method, or, as directed by a Certified Occupational Hygienist familiar with the exposure being assessed.

- Substances with acute effects will be adjusted based on total shift length
- Substances with chronic health effects will be adjusted on average weekly hours worked (determined from the roster / shift rotation pattern).
- Short Term Exposure Limits and Peak Limitations will not be adjusted
- Noise exposures will be adjusted according to Australian Standard 1269

Where mixed exposures occur, each substance must initially be assessed and compared to its individual OEL as detailed above. For substances which have similar health effects, and there may be reason to believe that the effects of the constituents are synergistic or additive, the mixed exposure should also be assessed.

## 6 RISK REDUCTION

### 6.1 Identify and select exposure controls

Where there is a risk of significant exposure identified, appropriate controls must be implemented to decrease exposure levels taking into consideration the hierarchy of controls. If exposures cannot be controlled immediately through elimination, substitution, separation or other engineering controls, then interim controls such as the use of Personal Protective Equipment (PPE) shall be implemented according to Australian Standards to help manage personal exposure.

### 6.2 Establish exposure control plans

Where analysis has identified that a SEG has a significant risk of exposure, an investigation shall be facilitated by the health and safety team in conjunction with line management and employee representatives. The intention of this investigation is to determine the sources of exposure and develop a list of potential control options. Controls may already be in place in which case they should be documented in relation to the risk they address. For inherently significant risks this will be documented in the Enterprise Risk Management System.

It is anticipated that sites will have both common controls and local controls that address exposure for specific groups.

Guidance on controls for specific hazards is listed in Attachment 3 – Guidance for management and control of identified health hazards

### 6.3 Implement controls

Upon completion of the investigation, a list of potential control options will be provided to the risk owners and it will be the responsibility of the risk owner to allocate a control owner and implement the appropriate controls.

## 7 RISK MONITORING

### 7.1 Periodically monitor exposure levels

Monitoring may be used to assess the effectiveness of controls (i.e. pre/post control testing), or to quantify a specific exposure related to a task or event.

### 7.2 Investigate Exceedances

Individual samples collected as part of any exposure monitoring program should be investigated where:

- An individual's sampling result exceeds 50% of the OEL, for all samples except noise.
- Noise exceedances should be investigated when results exceed 50% of the OEL and hearing protection is not worn.
- An individual's exposure to any agent is 'abnormal', that is, the result is inconsistent with the HRA or previous results.

Exposure exceedances meeting the above criteria shall be entered in SAP in accordance with the **Learning from Incidents Procedure CS-IM-01** [B/D/11/45318](#). The **Review of Hygiene Exceedance Form** must be completed, and a copy of the review should be saved in the relevant incident investigation file in TRIM.

All actions identified after completing the appropriate level of investigation shall be tracked to completion.

The requirements to resample a SEG following an exceedance should be determined as the outcome of the investigation. Resampling should generally occur following the implementation of additional controls to verify the effectiveness at reducing exposure levels.

A summary of single sample dust exceedance results must be reported to the WHS Regulator in a format approved by the Regulator. In addition, the WHS Regulator should be informed as soon as reasonably practicable following the investigation and the decision-making process relating to further action.

### **7.3 Review and audit exposure control plans**

Where controls have been implemented to reduce an exposure, or minimise the risk associated with an exposure, the effectiveness of these controls must be verified by means of either monitoring, inspection, auditing or by other means deemed appropriate at intervals determined by the Health and Safety team.

### **7.4 Monitor the health of employees**

Health Surveillance is a system of ongoing health monitoring. In the workplace, this is undertaken with workers who have exposures to hazards that have known or suspected health risks. It is designed to detect ill health effects in workers at an early stage and allow improvement of controls to prevent the development of disease.

It is a legal requirement for employees who are exposed to specific hazards to undergo health surveillance. The health monitoring for workers, including contractors is a shared duty between the persons conducting a business or undertaking to ensure health monitoring is provided.

CS Energy's Occupational Physician will periodically review site hygiene risk assessments and advise of any requirement for the workers belonging to a SEG to undergo health surveillance.

Any exceedance of the relevant occupational exposure limits will be referred to the Health and Safety Specialist who will refer to the Occupational Physician for advice.

The determined health surveillance will be scheduled, and medical assessment records kept on secured personal files.

### **7.5 Report and communicate exposure data**

CS Energy maintains a health exposure risk profile. The profile defines the exposures that apply to various work groups and ranks their risk in accordance with the HRA. CS Energy health exposure profile is maintained in TRIM and updated to reflect data and analysis as it becomes available. Refer to TRIM [F/18/1630](#).

In addition, all inherently significant health exposure risks and associated controls are captured in the Enterprise Risk Management System.

An annual data analysis is required once the exposure profile is determined. Changes in exposure profile must be reported to the management team and specifically;

- SEGs with an exposure profile >100% of the Occupational Exposure Limit (OEL)
- SEGs with an exposure profile 50-100% of the OEL
- Any action required to progress initiatives to reduce the exposure of workers.

The outcome of any hygiene exposure assessment monitoring must be communicated to those affected. The level of detail, the information provided, and the frequency is set out in the table below.

Type of Communication	To Who	When
Survey Reports	Health and Safety Business Partners Site Management Team Supervisors as required	Within 1 weeks of the survey report receipt
Individual Exceedance or 'abnormal' results in Survey Reports	Site Management Team Supervisors as required Health and Safety representative for the relevant workgroup WHS Regulator (dust only)	As soon as possible after receiving the survey report (and once the investigation is complete).
Personal Monitoring Letters	Monitored individual	Following receipt of survey report
Toolbox, Noticeboard	Workers (employees and contractors) in affected SEG	Within 1 week of report receipt
Reporting of exposure data analysis	Central Health Safety & environment Committee People and Safety Committee	At least annually
Annual exposure profile statistical data analysis and review	Health and Safety team Site Management team	Annually
SEG exposure data	Occupational Physician	Annually
Health Risk Assessment (HRA)	Site	2 yearly

## 8 DEFINITIONS

Term	Definition
HRA	Hygiene Risk Assessment is a documented assessment of health hazards and qualitative risk assessments at CS Energy
Occupational Hygiene	Occupational hygiene uses science and engineering to measure the extent of worker exposure, and to design and implement appropriate control strategies to prevent ill health caused by the working environment. It helps employers and employees understand the risks and promotes improved working conditions and working practices.
OEL	Occupational Exposure Limit is the maximum permissible concentration of a given gas, vapour, fibre or dust in the air in the workplace
Qualitative Hygiene Risk Assessment	Evaluation of potential personal exposure to workplace chemicals, physical, radiological, and/or biological agents based on personal experience and professional judgment.
Quantitative Hygiene Risk Assessment	Evaluation of actual personal workplace exposure to chemical, physical, radiological, and/or biological agents using accredited numerical and mathematical analysis.
SEG	Similar Exposure Groups are groups of workers who have the same general exposure to risk, for example; <ul style="list-style-type: none"> <li>• The similarity and frequency of the tasks they perform</li> <li>• The materials and processes with which they work</li> <li>• The similarity of the way they perform tasks</li> </ul>

## 9 REFERENCES

Reference No	Reference Title	Author
<a href="#">B/D/12/1363</a>	Procedure - CS-OHS-50 - Personal Protective Equipment (PPE)	CS Energy
<a href="#">B/D/11/30966</a>	Asbestos Management Plan	CS Energy
<a href="#">B/D/18/6609</a>	H&S Risk Management Procedure	CS Energy
<a href="#">B/D/17/15576</a>	Health Risk Assessment – Callide	GCG
<a href="#">B/D/17/15575</a>	Health Risk Assessment – Wivenhoe	GCG
<a href="#">B/D/17/15574</a>	Health Risk Assessment – Kogan	GCG
<a href="#">B/D/17/19863</a>	Health Risk Assessment – Brisbane	GCG
	Hygiene Monitoring schedule	CS Energy
<a href="#">B/D/17/17188</a>	Form – Review of Hygiene Exceedance	CS Energy
<a href="#">B/D/18/18030</a>	Dust Control Plan – Callide	CS Energy
<a href="#">B/D/18/22955</a>	Dust Control Plan - Kogan	CS Energy

## 10 RECORDS MANAGEMENT

To maintain continual improvement, suitability, safety and effectiveness of the organisation, CS Energy's registered documents will be reviewed on a two-yearly basis or at intervals specified by legislative or regulatory requirements. Review of controlled documents should occur where it has been identified that there are changes in technology, legislation, standards, regulation or where experience identifies the need for alteration to the content. Registered documents should also be reviewed following an incident, change management process, modification or where directed as part of a risk assessment process. A 'review' can simply mean that it has been identified, confirmed and appropriately recorded that no changes are required and that the existing process remains the same.

CS Energy must ensure that records are retained according to accountability, legal, administrative, financial, commercial and operational requirements and expectations. In compliance with records retention and disposal, all documentation created in relation to CS Energy business must be retained in line with minimum retention periods as detailed in legal retention and disposal schedules.

## 11 ATTACHMENTS

### 11.1 Attachment 1 – Similar Exposure Groups (SEGs)

SEG ID.		SEG description	Payroll Code
<b>1.0 Brisbane Office Similar Exposure Group (SEG)</b>		<b>Organisational Groups</b>	
1.1	BRIS - Administration	Includes employees who primarily perform administrative or knowledge-based functions in the office, with little physical on-site contact and working hours typically 8am-5pm, 5 days /week. Finance, Corporate Health & Safety, Records Management, IT, Administrative Assistants and Management functions, Contract Traders, Human Resources, Health & Safety	ADMB
1.2	BRIS - Technical Services	Consists primarily of technical specialists involved in engineering, technical oversight of station operations, infield inspections and supervision during overhaul activities. During normal operations the SEG is predominantly based in the Brisbane office with regular visits (fortnightly/monthly) to sites. Electrical, Mechanical, Civil Engineering	TSEB
1.3	BRIS - Shift Trading	Shift Traders work from a defined area in the CS Energy office on a 12.5hr roster to ensure 24hr/ day, 7 day /week coverage.	STRB
<b>2.0 Wivenhoe PS Similar Exposure Group (SEG)</b>		<b>Organisational Groups</b>	
2.1	WIV - Administration	Administrative staff	ADMW
2.2	WIV - Mechanical Maintenance	Mechanical Maintenance. Include contract mechanical workers in this group.	MMAW
2.3	WIV - Electrical Maintenance	Electrical Maintenance. Include electrical contract workers in this group.	EMAW
2.4	WIV - Technical Services	Site Manager, Hydro Engineer, Electrical Engineer, Electrical and Mechanical Technical officer, Overhaul Manager, Project staff	TSEW
2.5	WIV - Facilities Maintenance	Contract Cleaner, Facilities Management, Warehouse/Stores personnel	FMAW
<b>3.0 Kogan Creek PS Similar Exposure Group (SEG)</b>		<b>Organisational Groups</b>	
3.1	KOG - Administration	Senior Management, Commercial, Procurement, Finance, HR, other administrative functional areas	ADMK
3.2	KOG – Shift Production Operators/ Plant Control Operators	Plant Control Operators/Shift Production SEG are engaged in the operation of the power station facilities associated with the generation of electricity. Shift is 12.5 hrs 4 on 4 off. A significant component of the work involves the operation of plant through a digital control system in a plant control room. Production operators involved in control room activities spend most of a working shift seated at a control panel, viewing a series of large LCD screens displaying the plant controls in real time. Operators (Outside) provide field support to the control room operators and perform manual checks and interventions on plant as required.	POPK

SEG ID.		SEG description	Payroll Code
3.3	KOG - Mechanical Maintenance	Mechanical maintenance employees covering both station and unit plant, these personnel perform mechanical preventative maintenance, in-service running checks and breakdown maintenance. Kogan Creek Unit Maintenance, Kogan Creek Station Maintenance	MMAK
3.4	KOG - E&IC Maintenance	Combines plant electrical maintenance as well as electrical and instrument control (E&IC) personnel. Members of this SEG perform planned maintenance and inspection functions on the plant electrical distribution system as well as instrumentation control systems Electrical and Electrical/Instrumentation Maintenance technicians.	EMAK
3.5	KOG – Ash & Coal Processing	Management of the ash and dust disposal facility. Ash Disposal Operators and Operators involved in the coal stockpile management, bunkering and delivery of coal fuel to the station	ACPK
3.7	KOG – Field-based Supervisors	Field-based Supervisors oversee the actions of employees in production and maintenance functions during their work. This involves the scheduling, assigning and review of work performed on the station and may result in the supervisor being on the job site for a period. The remaining time is primarily spent in office or workshop environments. Maintenance Supervisors, Production Supervisors	FSUK
3.8	KOG – Technical Services	Provision of specialist technical supervision and advice to the power station operations and maintenance. A range of mechanical, electrical and civil engineering services are contained in the SEG along with overhaul planning and project management functions. Plant engineers are in the station on a daily basis for a varying period of time and are likely to be exposed to noise and dusts regularly. Specialist engineering functions spend time in the station at a lower frequency. Much of the engineering work is inspection-based with limited opportunity for exposures to chemicals aside from incidental exposure to dusts arising from leaks or fugitive emissions. Plant Engineers, Contracted Services, Overhauls, Technical Project teams, Chemists, Health & Safety are included as site based advisory functions.	TSEK
3.10	KOG – Facilities Maintenance	Encompasses a range of activities conducted by staff and contractors to provide industrial cleaning, domestic cleaning and domestic trades (such a Carpentry, Plumbing). Also a small cohort of workers who provide grounds-keeping and vegetation management services.	FMAK
3.11	KOG - Warehouse	Personnel working both within the warehouse building and outside yard storage. Their activities involve the receiving and transferring of goods and equipment to undercover or yard locations. Much of this work is performed with forklift trucks. Warehouse, Tool store Officers	WARK
<b>4.0 Callide PS Similar Exposure Group (SEG)</b>		<b>Organisational Groups</b>	
4.1	CAL - Administration	Senior Management, Commercial, Health & Safety, Security, Procurement, Finance, HR	ADMC

SEG ID.		SEG description	Payroll Code
4.2	CAL – Shift Production Operators	Shift Production SEG are engaged in the operation of the power station facilities associated with the generation of electricity. Shift is 12.5 hrs 4 on 4 off. A significant component of the work involves the operation of plant through a digital control system in a plant control room. Production operators involved in control room activities spend the majority of a working shift seated at a control panel, viewing a series of large LCD screens displaying the plant controls in real time. Operators (Outside) provide field support to the control room operators and perform manual checks and interventions on plant as required. Shift Operators	POPC
4.3	CAL - Mechanical Maintenance	Incorporating the maintenance employees covering both B and C stations and Common plant mechanical maintenance. Callide B and Callide C Unit Maintenance, Common Plant Maintenance groups including non-trade.	MMAC
4.4	CAL - E&IC Maintenance	The Electrical and Instrument Control (E&IC) Maintenance SEG performs maintenance and inspection functions on the plant control systems. These employees spend the majority of time in the field around plant systems interacting with electrical, instrumentation and IT equipment. Callide B and Callide C E&IC Maintenance technicians	EMAC
4.5	CAL – Ash Processing	SEG is involved in the management of the Waste Containment Facility (Ash Dam), and removal of ash and dust residues from the station to the dam for storage. Most of the work is performed from within earthmoving vehicles such as dump trucks, excavators and water trucks.	APRC
4.6	CAL – Coal Operations	SEG covers mobile equipment services to the coal stockpile. These are primarily contracted positions and involve extended periods operating mobile earthmoving equipment.	COPC
4.7	CAL – Field-based Supervisors	Field-based Supervisors oversee the actions of employees in production and maintenance functions during their work. This involves the scheduling, assigning and review of work performed on the station and may result in the supervisor being on the job site for a period. The remaining time is primarily spent in office or workshop environments. Maintenance Supervisors, Production Supervisors	FSUC
4.8	CAL -Technical Services	Provision of specialist technical supervision and advice to the power station operations and maintenance. A range of mechanical, electrical and civil engineering services are contained in the SEG along with overhaul planning and project management functions. Plant engineers are in the station on a daily basis for a varying period of time and are likely to be exposed to noise and dusts regularly. Specialist engineering functions spend time in the station at a lower frequency. Much of the engineering work is inspection-based with limited opportunity for exposures to chemicals aside from incidental exposure to dusts arising from leaks or fugitive emissions. Plant Engineers, Contracted Services, Overhauls, Technical Project teams, Chemists, Health & Safety are included as site based advisory functions.	TSEC

SEG ID.		SEG description	Payroll Code
4.9	CAL - Chemical Operations	Consists of a small number of specialised production operators who oversee the operation of process water treatment plant outside of the main power station building. Also includes Laboratory personnel engaged in periods of time spent in the field and in office settings. Does not include Chemists – included in Technical Services.	CHEC
4.10	CAL – Facilities Maintenance	Encompasses a range of activities conducted by staff and contractors to provide industrial cleaning, domestic cleaning and domestic trades (such a Carpentry, Plumbing, air conditioning maintenance). Also, a small cohort of workers who provide grounds-keeping and vegetation management services.	FMAC
4.11	CAL – Warehouse	Personnel working both within the warehouse building and outside yard storage. Their activities involve the receiving and transferring of goods and equipment to undercover or yard locations. Much of this work is performed with forklift trucks. Warehouse, Tool store Officers	WARC
<b>5.0 Overhaul Similar Exposure Group (SEG)</b>		<b>Organisational Groups</b>	
5.1	Overhaul Industrial Cleaners	Groups – usually contractor employees – who typically work for finite durations on power station sites performing specific activities on overhaul.	OHIC
5.2	Overhaul Air Heater Repairs		OHAC
5.3	Overhaul Baghouse		OHBH
5.4	Overhaul Ducts & Burners		OHDB
5.5	Overhaul Ladders		OHLA
5.6	Overhaul Scaffolding		OHSC

## 11.2 Attachment 2 – Occupational Exposure Limit Table

Substance	CAS Number	WES / OEL	Notes
<b>Ammonia</b>	7664-41-7	TWA 25ppm, 17mg/m <sup>3</sup> STEL 35ppm, 24mg/m <sup>3</sup>	
<b>Asbestos (all)</b>	12001-29-5 (chrysotile) 12172-73-5 (Amosite) 12001-28-4 (Crocidolite)	All – 0.1 f/mL	IARC Group 1
<b>Benzene</b>	71-43-2	TWA 1ppm, 3.2mg/m <sup>3</sup>	IARC Group 1
<b>Chlorine</b>	7782-50-5	Peak 1 ppm, 3 mg/m <sup>3</sup>	
<b>Chromium Metal</b>	7440-47-3	TWA 0.5 mg/m <sup>3</sup>	
<b>Copper (fume)</b>	7440-50-8	TWA 0.2 mg/m <sup>3</sup>	
<b>Ethyl Benzene</b>	100-41-4	TWA 100ppm, 434 mg/m <sup>3</sup> STEL 125ppm, 543 mg/m <sup>3</sup>	IARC Group 2B
<b>Inhalable Dust (not otherwise classified) *</b>		TWA 10mg/m <sup>3</sup> <sup>^</sup>	*Nuisance dusts <sup>^</sup> As described in “ <i>Guidance on the interpretation of workplace exposure standards for airborne contaminants</i> ”
<b>Iron Oxide fume (Fe<sub>2</sub>O<sub>3</sub>) (as Fe)</b>	1309-37-1	TWA 5 mg/m <sup>3</sup>	
<b>Isocyanates, all (as NCO)</b>		TWA 0.02 mg/m <sup>3</sup> STEL 0.07 mg/m <sup>3</sup>	IARC Group 2B (TDI) IARC Group 3 (Others)
<b>Lead, inorganic dusts &amp; fumes (as Pb)</b>	7439-92-1	TWA 0.05mg/m <sup>3</sup>	IARC Group 2A
<b>Manganese, fume (as Mn)</b>	7439-96-5	TWA 1mg/m <sup>3</sup> STEL 3mg/m <sup>3</sup>	
<b>Nickel, metal</b>	7440-02-0	TWA 1 mg/m <sup>3</sup>	IARC Group 2B
<b>Nitrogen Dioxide</b>	10102-44-0	TWA 3ppm, 5.6mg/m <sup>3</sup> STEL 5ppm, 9.4mg/m <sup>3</sup>	
<b>Noise</b>		TWA (a) LAeq,8h of 85 dB(A); or (b) LC,Peak of 140 dB(C).*	*Work Health and Safety Regs. 2011
<b>Respirable Coal Dust</b>		TWA 2.5mg/m <sup>3</sup>	
<b>Respirable Dust (NOC)</b>		TWA 2.5mg/m <sup>3</sup>	

Substance	CAS Number	WES / OEL	Notes
<b>Silica, crystalline</b>	Quartz 14808-60-7	TWA 0.1 mg/m <sup>3</sup>	IARC Group 1
<b>Styrene, Monomer</b>	100-42-5	TWA 50ppm, 213 mg/m <sup>3</sup> , STEL 100ppm, 426 mg/m <sup>3</sup>	IARC Group 2B
<b>Sulphuric Acid</b>	7664-93-9	TWA 1mg/m <sup>3</sup> STEL 3mg/m <sup>3</sup>	IARC Group 1 (as acid mists, strong inorganic)
<b>Synthetic Mineral Fibres (Man-Made Vitreous Fibres)</b>	Glass wool, rock wool, slag wool and continuous glass filament / Low biopersistence fibres	2 mg/m <sup>3</sup> (8 hour TWA)	Varies by fibre type; some IARC Group 2
	Special purpose fibres / RCF / High biopersistence fibres	2 mg/m <sup>3</sup> & 0.5fm/L (8 hour TWA)	
<b>Toluene</b>	108-88-3	TWA 50ppm, 191 mg/m <sup>3</sup> STEL 150ppm, 574 mg/m <sup>3</sup>	Absorption through the skin may be a significant source of exposure.
<b>Vibration (Whole Body)*</b>		RMS Acceleration EAV 0.5 m/s <sup>-2</sup> RMS Acceleration ELV 1.15 m/s <sup>-2</sup>  Vibration Dose Value EAV 9.1 m/s <sup>1.75</sup> Vibration Dose Value ELV 21 m/s <sup>1.75</sup>	Exposure Standards considered good practice; not legislated in Australia  *As referenced in EU2002/44/EC Physical Agents (Vibration) Directive
<b>Volatile Organic Compounds</b>		*	*No specific exposure standard for VOC's as a group.
<b>Welding fumes (NOC)</b>		TWA 5mg/m <sup>3</sup>	IARC Group 1
<b>Xylene (o-, m-, p- isomers)</b>		TWA 80ppm, 350mg/m <sup>3</sup> STEL 150ppm, 655 mg/m <sup>3</sup>	

NB – the OELs provided in this table will be adjusted depending on different shift arrangements.

## 11.3 Attachment 3 – Guidance for management and control of identified health hazards

### 11.3.1 Ammonia

Ammonia	
<b>Overview</b>	<p>Ammonia is a colourless gas with a characteristic pungent smell. It is lighter than air, its density being 0.589 times that of air. It is easily liquefied due to the strong hydrogen bonding between molecules; the liquid boils at <math>-33.3\text{ }^{\circ}\text{C}</math> (<math>-27.94\text{ }^{\circ}\text{F}</math>), and freezes at <math>-77.7\text{ }^{\circ}\text{C}</math> (<math>-107.86\text{ }^{\circ}\text{F}</math>) to white crystals. Liquid ammonia possesses strong ionising powers. Liquid ammonia has a very high standard enthalpy change of vaporization and can therefore be used in laboratories in uninsulated vessels without additional refrigeration.</p> <p>Acute inhalation of ammonia causes rapid onset of signs and its toxic effects are mediated through its irritant and corrosive properties. Features include irritation to the nose, throat and respiratory tract. Increased lacrimation, coughing, an increased respiratory rate as well as respiratory distress may occur. Substantial exposures can cause burns of all depths in the oral cavity, nasopharynx, larynx and trachea, together with airway obstruction and bronchiolar and alveolar oedema. Chronic inhalation is associated with increased cough, phlegm, wheeze and asthma.</p>
<b>Source</b>	<p>Unit feed water – 1.5% solution          Laboratory reagent – 28%</p>
<b>Exposure Standard</b>	TWA 8hr day 17 mg/m <sup>3</sup>
<b>Health Effects</b>	Acute upper respiratory tract and eye damage, chronic cough, increased asthma frequency
<b>Monitoring Requirements</b>	Maintenance on Ammoniaguard for cylinders in service
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>          Removal of ammonia from water treatment process</p> <p><b>Engineering</b>          Isolation &amp; Lock-out</p> <p><b>Administration</b>          Permit to Work          Ammonia Monitoring          Safety checks – inspections, calibration, maintenance          Training          Records – monitoring and inspections          Storage          Chemalert - SDS</p> <p><b>PPE</b>          Safety glasses/goggles          Gloves          Safety showers?</p>

### 11.3.2 Asbestos

Asbestos	
<b>Overview</b>	<p>Asbestos is defined as the fibrous form of mineral silicates belonging to the serpentine and amphibole groups of rock-forming minerals, including actinolite, amosite (brown asbestos), crocidolite (blue asbestos), chrysotile (white), tremolite, or any mixture containing one or more of these.</p> <p>Asbestos-containing materials (ACM) may still be encountered in buildings and structures, especially those built between the 1950s to early 1980s. Some uses of ACM continued until 2003, notably in friction materials (brakes) and gaskets.</p>

Asbestos	
	<p>Asbestos fibres are strong, heat resistant and have insulating properties. Asbestos fibres are not visible to the naked eye. They are very light, remain airborne for a long time, and can be carried by wind and air currents over large distances. Asbestos fibres do not dissolve in water or move through soil. They are generally not broken down to other compounds and remain virtually unchanged over long periods.</p> <p>Chronic exposure to asbestos fibres increases the risk of progressive fibrotic lung diseases, reduced lung function and exercise capacity, development of benign pleural plaques, increased risk of lung and pleural cancers.</p>
<b>Source</b>	<p>Asbestos Materials e.g. Thermal or acoustic insulation which is friable</p> <p>Asbestos Containing Materials (ACM) e.g. asbestos cement products, friction materials, gaskets</p>
<b>Exposure Standard</b>	TWA (8hr) 0.1 mg/m <sup>3</sup>
<b>Health Effects</b>	<p>Pleural Plaques</p> <p>Asbestosis</p> <p>Progressive Fibrotic lung disease</p> <p>Mesothelioma</p> <p>Lung Cancer</p>
<b>Monitoring Requirements</b>	Air and dust sampling – 12-month intervals – friable vs ACM
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Removal of asbestos containing materials</p> <p><b>Engineering</b></p> <p>Encapsulation and sealing</p> <p>Enclosure/isolation</p> <p><b>Administration</b></p> <p>Asbestos Removal Control Checklist</p> <p>Asbestos register</p> <p>Asbestos Management Plan</p> <p>Asbestos inspections and audits</p> <p>Training – asbestos removal</p> <p>Clearance inspections</p> <p>Asbestos labelling and signage</p> <p>Records – monitoring and inspections, survey reports</p> <p>Storage, waste</p> <p>Supervision</p> <p>Chemalert – SDS</p> <p>Health surveillance</p> <p>Air monitoring</p> <p><b>PPE</b></p> <p>Respiratory protection</p> <p>Goggles</p> <p>Coveralls</p> <p>Laundering of contaminated clothing</p>
<b>Reference</b>	<p>CS Energy Asbestos Management Plan</p> <p>CS Energy Asbestos Register</p> <p>Code of Practice How to Safely Remove Asbestos 2011</p>

Asbestos	
	Code of Practice How to Manage and Control Asbestos in the Workplace 2011

### 11.3.3 Biological Agents (Legionella)

Biological Agents (Legionella)	
<b>Overview</b>	<p>Legionella bacteria can be found in most fresh-water environments, in natural and constructed water sources and in the soil. Sampling and testing of these water sources for Legionella will invariably find its presence.</p> <p>If conditions are favourable to the micro-organisms, Legionella bacteria can live and multiply rapidly in the water of a cooling tower, spa or tepid water systems and, if susceptible persons inhale contaminated water vapour from these systems, they may contract the disease.</p> <p>Many infections by Legionella pneumophila do not result in recognisable signs and symptoms. Commonly a person may have been ill and not realised that the cause was exposure to Legionella bacteria. It is reported that up to 30 per cent of healthy Australians may show evidence of previous infection by positive antibody tests.</p> <p>Fatalities associated with Legionnaire's Disease have been associated with cooling towers, spas, tepid water systems and potting mix.</p>
<b>Source</b>	<p>Cooling towers          Dam water          Raw water pipeline          Potting mix</p>
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	<p>Mild respiratory illness          Pontiac Fever (Influenza like illness)          Legionnaire's Disease (Pneumonia like illness)</p>
<b>Monitoring Requirements</b>	Water sampling (weekly, monthly and 6 monthly)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>          Prohibit use of cooling towers.</p> <p><b>Engineering</b>          Chemical dosing – cleaning and disinfection</p> <p><b>Administration</b>          Servicing and inspection – maintenance program          Access and egress          Monitoring – records          Incident management - SAP          Chernalert – SDS          Signage</p> <p><b>PPE</b>          Respiratory Protection Program – P2 respirator</p>
<b>Reference</b>	<p>Guide to Legionella control in cooling water systems, including cooling towers          AS 3666 Ait handling and waster systems of buildings-microbial control          AS 5059-2006 Power Station Cooling Tower Water Systems - Management of Legionnaires Disease Health Risk</p>

### 11.3.4 Chlorine

Chlorine	
<b>Overview</b>	<p>Chlorine exists as a gas at normal temperature and pressure. The gas is pressurised and cooled to liquid form for storage and shipping. When released, it rapidly forms a yellow-green gas that stays close to the ground and spreads rapidly. Chlorine gas is not flammable but it can react explosively with other chemicals such as turpentine and ammonia. It can be recognised by its pungent, irritating, bleach-like odour which usually provides warning of exposure.</p> <p>Chronic exposure to chlorine may cause erosion of the teeth. Multiple exposures to chlorine have produced flu-like symptoms and a high risk of developing reactive airways dysfunction syndrome (RADS). Chlorine exposure may result in chronic inflammation of the large airways (bronchitis). Chlorine gas is highly soluble in water; therefore, it is severely irritating on contact with moist tissues, such as the eyes, skin, nose, throat, and upper respiratory tract. At low concentrations, chlorine can cause eye and nose irritation, sore throat, and cough. At high exposure levels, irritation of the upper respiratory tract and accumulation of fluid in the lungs (pulmonary oedema) contribute to a sensation of choking. Suffocation is the characteristic initial complaint of people exposed to chlorine.</p>
<b>Source</b>	<p>Cooling tower dosing – approx. 1% solution</p> <p>Chlorine Plant</p>
<b>Exposure Standard</b>	<p>TWA (8hr) 3 mg/m<sup>3</sup> (peak limitation)</p> <p>(refer to CS Energy health monitoring schedule)</p>
<b>Health Effects</b>	<p>Skin and eye irritant</p> <p>Pulmonary oedema</p> <p>Olfactory fatigue</p> <p>Corrosion of tooth enamel</p> <p>Chronic bronchitis</p>
<b>Monitoring Requirements</b>	<p>Chlorguard system on Chlorine cylinders in service</p>
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Removal of chlorine from site</p> <p><b>Engineering</b></p> <p>Automated dosing</p> <p><b>Administration</b></p> <p>Servicing and inspection – maintenance program</p> <p>Access and egress</p> <p>Monitoring – records</p> <p>Chemalert – SDS</p> <p>Signage</p> <p><b>PPE</b></p> <p>Coveralls</p> <p>Splash proof goggles</p> <p>Gloves</p> <p>Respirator – Type B or air-line respirator</p>

### 11.3.5 Community Acquired Infectious Diseases

Community Acquired Infectious Diseases	
<b>Overview</b>	<p>Specific infectious diseases prevalent in the community which are responsible for normally self-limiting short-term illness of either the gastrointestinal or respiratory tract. Sources may include bacteria (<i>L. pneumophila</i>, <i>P. aeruginosa</i>), viruses (<i>Adenovirus</i>, <i>Norovirus</i>, <i>Influenzavirus A</i>), protozoa (<i>Cryptosporidium spp.</i>).</p> <p>The most susceptible people include; the elderly, smokers, and those on immunosuppressive therapy, individuals with chronic obstructive pulmonary disease (COPD), organ transplant patients, and people taking corticosteroid therapy. It is important to emphasize that relatively healthy individuals can also be at risk of contracting disease.</p> <p>With communal food preparation areas and bathroom facilities, there is a potential for some transmission. The most common pathway for transmission of viral diseases in workplaces is through direct contact, where contact with contaminated surfaces or agents (fomites) by hands leads to the transmission of infectious agents.</p>
<b>Source</b>	Contact with ill co-workers, contaminated food, clothing, utensils and furniture.
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	<p>Gastrointestinal communicable disease</p> <p>Respiratory communicable disease</p>
<b>Monitoring Requirements</b>	N/A
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Sick people to stay at home</p> <p><b>Engineering</b></p> <p><b>Administration</b>            Hygiene practices – hand washing            Cleaning contract – communal areas            Fridge cleaning            Flu shots – health promotion            Education – toolbox talks            First aid facilities</p> <p><b>PPE</b> Gloves e.g. food preparation</p>

### 11.3.6 Crystalline Silica

Crystalline Silica	
<b>Overview</b>	<p>Silica is silicon dioxide, a naturally occurring widely abundant mineral that forms the major component of most rocks and soils. There are non-crystalline and crystalline forms of silicon dioxide. Crystalline silica is also known as free silica. Crystalline silica dust particles which are small enough to penetrate deep into the lung are termed respirable. Respirable crystalline silica may cause lung damage.</p> <p>The coal supplied to Callide PS is from the Callide Coal Measures. This deposit is described in the Queensland Government Mining Journal as “Late Triassic, very sub-hydrous, with heterogeneous distributions of iron and phosphorus and low silica ash. A sub-bituminous rank that is feedstock for Callide power station; one of the lowest energy commercially exploited coals in Australia”. The coal supplied to Kogan Creek PS is from the Walloon Coal Measures of Middle Jurassic age. This consists of two coal seam horizons: The Upper group (seams K, M, N, and O) —11.5m average thickness; the Lower group (seams S, T and U) —3m average thickness. The Lower group is separated from the Upper group by up to 14m of strata.</p>

Crystalline Silica	
	<p>The coal is perhydrous, high volatile bituminous type and is comprised mainly of macerals of the vitrinite and liptinite groups. It typically has very high volatile matter content with fuel ratio generally in the range 0.9 to 1.1 and produces a high yield of gas and tar. The coal has a low to moderate ash content, and is relatively hard, with a Hardgrove Grindability Index (HGI) that generally ranges from about 30 to 40.</p> <p>Contaminants of interest from an occupational health perspective include the presence of crystalline silica (<math>\alpha</math>-Quartz) and bituminous coal.</p> <p>Exposure to respirable crystalline silica is responsible for progressive fibrotic lung diseases, reductions in lung function and exercise capability. Crystalline Silica in the form of quartz or cristobalite is classified by IARC as a Group 1 carcinogen associated with an increased risk of lung cancers in humans. Acute exposure to respirable dusts can induce inflammation of the lungs, reduced lung function and lowered exercise tolerance. A rare form of rapidly progressing silicosis is associated with acute silica exposures. Silica containing dusts in Coal fired power stations are primarily from fly ash, the residue remaining from coal combustion. These dusts are primarily amorphous (non-crystalline) glassy particles with small remnants of microcrystalline quartz. The toxicity of these dusts is considerably lower than freshly generated crystalline silica from mining or construction activities. Epidemiological studies of coal fired power station workers have not found evidence of radiographic changes in the lung related to fly ash exposure.</p>
<b>Source</b>	Fly ash, coal dust
<b>Exposure Limit</b>	TWA (8hr) 0.1 mg/m <sup>3</sup> (refer to CS Energy hygiene monitoring schedule)
<b>Health Effects</b>	Carcinogen, obstructive lung disease
<b>Monitoring Requirements</b>	Personal dust monitoring
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>            Process automation</p> <p><b>Engineering</b>            Isolation            Ventilation            Enclosure and segregation            Dust suppression            Air conditioned cabins</p> <p><b>Administration</b>            Servicing and inspection – maintenance program            Monitoring – records, health surveillance            Incident management – SAP            Housekeeping            Chernalert – SDS            Signage</p> <p><b>PPE</b>            Respiratory Protection Program – P2 respirator</p>

### 11.3.7 Ergonomics

Ergonomics	
<b>Overview</b>	Ergonomic hazards are prevalent throughout CS Energy, ranging from prolonged static postures encountered by dozer and earthmoving plant operators, the manual operation of valves and workstation arrangements of production operators, through to hazardous manual tasks encountered by maintenance personnel.

Ergonomics	
	<p>Employees on industrial sites can perform manual handling activities in awkward positions, or with their hands above their head, leading to an increased risk of ergonomic injury. Variables in assessing the likelihood of risk include the mass and size of the object, the repetitive nature of the task and task duration.</p> <p>Office based personnel are faced with different ergonomic hazards such as static or poor postures which may cause musculoskeletal injury and discomfort.</p> <p>Ergonomics is the science of designing the job, equipment and workplace to fit the worker. Proper ergonomic design is necessary to prevent musculoskeletal injuries, which can develop over time and can lead to long term disability.</p>
<b>Source</b>	<p>Operating earthmoving equipment</p> <p>Lowering, pushing, pulling, carrying, moving, holding or restraining an object</p>
<b>Exposure Limit</b>	N/A
<b>Health Effects</b>	Musculoskeletal disorders
<b>Monitoring Requirements</b>	Hazardous Manual Task Assessments
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>            Risk management – eliminate ergonomic risk</p> <p><b>Engineering</b>            Plant and Equipment Specifications – OEM, plant modification</p> <p><b>Administration</b>            Task analysis, supervision            Job Dictionary            Hazardous Manual Task Assessments            Medical Assessment            Health Surveillance            Signage</p> <p><b>PPE</b>            Mechanical aid</p>
<b>References</b>	Hazardous Manual Tasks Code of Practice 2011

### 11.3.8 Fatigue

Fatigue	
<b>Overview</b>	<p>Fatigue is more than feeling tired and drowsy; it is a state of mental and/or physical exhaustion that reduces a person's ability to perform work safely and effectively.</p> <p>Fatigue can be caused by:</p> <ul style="list-style-type: none"> <li>• prolonged or intense mental or physical activity</li> <li>• sleep loss or disruption of your internal body clock</li> <li>• long shifts</li> <li>• short recovery times between shifts</li> <li>• strenuous jobs</li> <li>• long commuting times</li> <li>• poor sleep</li> <li>• family demands</li> </ul>

Fatigue	
	Fatigue may increase the risk of incidents because of a lack of alertness and slower reaction times. It can also affect the ability to make good decisions.
<b>Source</b>	Hours of work/shift work, eye fatigue e.g. lighting, sleep disorders, travel, prescribed medication, drugs and alcohol, situation and lifestyle issues, noise.
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	Reduced decision making ability. Injury due to poor decision making.
<b>Monitoring Requirements</b>	Personal monitoring and awareness Fatigue Observation Record and Fatigue Assessment Form Drug and alcohol testing – random
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b></p> <p><b>Administration</b>            Job rotation, job planning            Supervision            Observation record and Fatigue Assessment            Mentoring, coaching and education            Drug and/or alcohol testing            Contractor Management            Overhaul planning            Journey Management            EAP</p> <p><b>PPE</b></p>

### 11.3.9 Hand Arm Vibration

Hand Arm Vibration	
<b>Overview</b>	<p>Hand Arm Vibration (HAV) is vibration transmitted to the hand and arm when using hand-held power tools and hand-guided machinery like powered lawn-mowers and while holding materials being processed by machines. HAV is commonly experienced by people who use jack-hammers, chainsaws, grinders, drills, riveters and impact wrenches.</p> <p>Hand-arm vibration syndrome (HAVS) is a form of Raynaud's phenomenon in which spasm of the digital arteries leads to damage to the nerves, vessels, bones, and joints of the hands and fingers. Early symptoms are blanching and cyanosis of the fingers aggravated by cold. Attacks last from 15 minutes to 2 hours and are reversible after discontinuing exposure. This cumulative trauma injury occurs in workers with at least 2000 hours and usually over 8000 hours of exposure to vibration from hand tools in the range of 15-1500 Hz, but especially in the range of 125-300 Hz. The latent interval from first exposure to onset of blanching varies from 1 month to 30 years. From the initial episodes of blanching, the worker may later develop sensory and motor disturbances with impairment of fine motor skills, frequent attacks affecting all fingers, and finally trophic changes of the fingertips.</p>
<b>Source</b>	Lawnmower, whipper snipper, angle grinder, hammer drill, chainsaws
<b>Exposure Limit</b>	<p>No specific limits are set for Australia however, recommendations from Safe Work Australia are to adopt the values contained within Directive 2002/44/EC of the European Parliament and of the Council of 25 June 2002.</p> <p>r.m.s Acceleration A(8) EAV 2.5m/s<sup>2</sup> , ELV 5.0m/s<sup>2</sup>            (campaign style exposure assessment – refer to CS Energy hygiene monitoring schedule)</p>

<b>Hand Arm Vibration</b>	
<b>Health Effects</b>	<p>Disrupted circulation</p> <p>Damage to nerves resulting in tingling and numbness</p> <p>Damage to tendons, muscles, bones and joints</p> <p>Carpal tunnel syndrome</p> <p>Vibration white finger</p> <p>Progressive neurological disorder</p>
<b>Monitoring Requirements</b>	Campaign style exposure assessment – hand arm vibration monitor
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Replace vibrating plant (if possible)</p> <p>Substitute high vibration tools with lower vibration emission levels</p> <p><b>Engineering</b></p> <p>Isolating or cushioning</p> <p><b>Administration</b></p> <p>Minimise how long workers use high vibration tools</p> <p><b>PPE</b></p> <p>Gloves</p>
<b>References</b>	<p>Safe Work Australia – Guide to managing risks of exposure to hand arm vibration 2015</p> <p>Safe Work Australia – Information sheet – hand arm vibration 2015</p> <p>Safe Work Australia – Guide to measuring assessing hand arm vibration 2015</p> <p>Code of Practice - Managing risks of plant in the workplace 2013</p>

### 11.3.10 Hazardous Substances (other)

<b>Hazardous Substances (other)</b>	
<b>Overview</b>	<p>Hazardous substances are chemicals and other substances that can affect your health, causing illness or disease. They may be solvents, pesticides, paints, adhesives, petroleum products, heavy metals or any other substance that is hazardous to health and is used or produced at work.</p> <p>Hazardous substances can take many forms - liquids, solids, vapours, gases, fumes or dusts. To be classified as a hazardous substance, the ingredients of the substance must be present in concentrations that are known to cause health effects. For some hazardous substances, exposure standards have been set. These apply where a substance is a contaminant in workplace air - for example as a dust, fume or gas. Where an exposure standard exists for a particular substance, the concentration of that substance in the air at work must be kept below the prescribed level.</p> <p>A number of miscellaneous hazardous substances, typically in small quantities are present on CS Energy sites. These are normally used for minor maintenance tasks and present a negligible risk under normal use conditions. This is primarily due to their moderate toxicity, small quantities, small doses or infrequent use.</p>
<b>Source</b>	<p>Tasks requiring the use of chemicals</p> <p>Chemicals produced at the workplace</p>
<b>Exposure Standard</b>	<p>Varied – refer to Chemalert SDS report for individual chemicals</p> <p>(refer to CS Energy hygiene monitoring schedule)</p>
<b>Health Effects</b>	Varies with causative agent; however, commonly irritants, central nervous system effects, systemic organ effects
<b>Monitoring Requirements</b>	Various exposure monitoring methods depending on hazardous substance – refer to Chemalert SDS
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Risk assessment – substitution with less hazardous chemicals</p>

Hazardous Substances (other)	
	<p><b>Engineering</b>            Isolation and Lockout            Process Automation</p> <p><b>Administration</b>            Refer to Chernalert – SDS            Chemical Approval process – Chemical Coordinator            Hazardous Substances register            Job planning            Risk assessment – JSEA, 2x2            Hazardous Substance audits</p> <p><b>PPE</b>            Various – refer to SDS for individual chemical</p>
<b>References</b>	Managing Risks of Hazardous Chemicals in the Workplace Code of Practice 2013

### 11.3.11 Herbicides

Herbicides	
<b>Overview</b>	The term herbicides in this assessment refers to the chemicals Glyphosate and Picloram, used in the products Roundup® and Tordon® respectively. Both of these substances exhibit low human acute toxicity with the reported effects being localised irritation of skin and eyes. Tordon® is typically present in an alkaline solution which can cause skin burns following prolonged contact, it does not cause sensitisation and exhibits low chronic toxicity.
<b>Source</b>	Destroy unwanted vegetation
<b>Exposure Limit</b>	N/A
<b>Health Effects</b>	Skin and eye irritation, rash and dermatitis
<b>Monitoring Requirements</b>	N/A – acute illness or injury
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b>            Ventilation – if required</p> <p><b>Administration</b>            Storage            Risk management            Chernalert – SDS            Chemical approval – Chemical Coordinator</p> <p><b>PPE</b>            Splash proof goggles            PVC or rubber gloves            Coveralls            Type A Class P1 respirator</p>

### 11.3.12 Inhalable Dust

Inhalable Dust	
<b>Overview</b>	Atmospheric dust can give rise to a number of lung disorders or diseases. One of these diseases is pneumoconiosis, which is as a general term for lung diseases caused by dust inhalation.

Inhalable Dust	
	<p>All respirated dusts must be considered harmful in some degree. Even where there may be only slight danger to the lungs, there is very likely some adverse effect on the respiratory system, particularly to asthmatics or allergy sufferers. Dust particles of size ranging from 0.001 to 0.1 mm (1 to 100 microns) pose a threat to health when they are airborne, reducing visibility, creating an uncomfortable environment (irritation of eyes, ears, nose, throat, skin) and possibly resulting in damage to the tissues of the lungs. Larger particles, 10 to 100 micrometres, are termed <i>inhalable</i>. When breathed in, inhalable particles are trapped in the upper respiratory passages.</p> <p>When dust-laden air is inhaled, most of the dust particles greater than 5 microns are caught in the mucus which coats the nose, sinuses, trachea and bronchi. They are moved up with the mucus towards the throat and either expectorated or swallowed. Dust particles less than 5 microns can pass into the lungs.</p> <p>Acute exposure to high concentrations of inorganic dusts can produce lung overload and induce inflammation of the lungs. Chronic exposure to insoluble inorganic dusts previously considered inert can contribute to chronic obstructive airways disease (COAD), or chronic obstructive pulmonary disease (COPD).</p>
<b>Source</b>	Coal dust
<b>Exposure Standard</b>	TWA (8hr) 10 mg/m <sup>3</sup>
<b>Health Effects</b>	Upper respiratory tract irritant effects Chronic obstructive lung disease
<b>Monitoring Requirements</b>	Personal dust monitoring (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Process automation</p> <p><b>Engineering</b> Isolation Ventilation Enclosure and segregation Dust suppression Air conditioned cabins</p> <p><b>Administration</b> Servicing and inspection – maintenance program Monitoring – records, health surveillance Incident management – SAP Housekeeping Chemalert – SDS Signage</p> <p><b>PPE</b> Respiratory Protection Program – P2 respirator</p>
<b>References</b>	AS3640-2009 Workplace atmospheres – Method for sampling and gravimetric determination of inhalable dust

### 11.3.13 Ionising Radiation

Ionising Radiation	
<b>Overview</b>	<p>Ionizing radiation has enough energy to cause chemical changes by breaking chemical bonds. This effect can cause damage to living tissue. Shorter wavelength ultraviolet radiation begins to have enough energy to break chemical bonds. X-ray and gamma ray radiation, which are at the upper end of the electromagnetic spectrum, have extremely high energy. It has enough energy to strip electrons from an atom or, in the case of very high-energy radiation, break up the nucleus of the atom. The process in which an electron is given enough energy to break away from an atom is called ionization. Each ionization releases energy which is absorbed by material surrounding the ionized atom. Compared to other types of radiation that may be absorbed, ionizing radiation deposits a large amount of energy into a small area. All ionizing radiation is capable, directly or indirectly, of removing electrons from most molecules.</p> <p>Exposure to ionising radiation can damage DNA and cause cancer. In addition, by damaging the genetic material (DNA) contained in cells of the body, ionising radiation can cause genetic mutations that can be passed on to future generations. Acute exposure to large amounts of radiation, a rare occurrence, can cause sickness in a few hours or days and death within 60 days of exposure. In extreme cases, it can cause death within a few hours of exposure.</p>
<b>Source</b>	<p>Fixed sealed source industrial radiation gauge</p> <p>Non destructive testing (NDT)</p>
<b>Exposure Limit</b>	<p>The Radiation Safety Regulation 2010 prescribes;</p> <ul style="list-style-type: none"> <li>• 20 mSv/annum for radiation workers (averaged over a period of 5 consecutive calendar years)</li> <li>• 1 mSv/annum above background radiation for other workers</li> </ul>
<b>Health Effects</b>	<p>Carcinogen</p> <p>Acute tissue injury</p>
<b>Monitoring Requirements</b>	<p>Radiation survey meters</p>
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Removal of radiation gauges form sites</p> <p>Substitute NDT practises without radiation</p> <p><b>Engineering</b></p> <p>Isolation &amp; Lock-out</p> <p><b>Administration</b></p> <p>Permit to Work</p> <p>Radiation Gauge Monitoring</p> <p>Safety checks – 3 monthly, 6 monthly, annual</p> <p>Training – licences, RSO</p> <p>Approval - acquisition, supply and relocation</p> <p>Records – sources leakage tests, inventory and location of devices, store log, incident reports</p> <p>Calibration test and maintenance</p> <p>Storage</p> <p>Radiation Safety and Protection Plan</p> <p><b>PPE</b></p>
<b>References</b>	<p>Radiation Safety and Protection Plan – Callide, Kogan</p> <p>Radiation Safety Act 1999</p> <p>Radiation Safety Regulation 2010</p>

### 11.3.14 Isocyanates

Isocyanates	
<b>Overview</b>	<p>Isocyanates are a reactive class of organic compounds commonly used in 2-part polyurethane coatings and expansion products. Isocyanates can enter the body via inhalation and skin absorption. Traditionally inhalation exposure from spray painting results in the highest exposures, however skin contact and the inhalation of vapours from mixing also pose a risk.</p> <p>Isocyanates are recognised as causing sensitisation in exposed individuals resulting in the development of occupational asthma. In sufficiently high concentrations in the air, isocyanates have a primary irritant effect on the respiratory tract. Workers may develop sensitisation to isocyanates, resulting in asthma like symptoms such as chest tightness, coughing, wheezing and shortness of breath. Following sensitisation, onset of these symptoms may be caused from very low exposures below the relevant occupational exposure standard. Asthmatics are more susceptible to sensitisation as well as other adverse health effects, and therefore should be screened from tasks involving isocyanates.</p> <p>There is evidence that for susceptible workers, recurrent exposures may result in impairment of ventilatory function. Skin contact with isocyanates results in irritation and is a major pathway in the development of sensitisation. Like respiratory sensitisation, once contracted, health effects such as skin rashes can present following very low exposures to isocyanates.</p>
<b>Source</b>	Chemicals e.g. repair kits, adhesives, sealants, paints, electrical cleaning substances
<b>Exposure Standard</b>	TWA (8hr) 0.02 mg/m <sup>3</sup> STEL (15 minute) 0.07 mg/m <sup>3</sup>
<b>Health Effects</b>	Respiratory sensitiser Asthma Skin sensitiser Headache, loss of consciousness, coma
<b>Monitoring Requirements</b>	<p>Medical examination at 6 weeks and then at 6 monthly intervals during continued exposure. The medical examination includes;</p> <ul style="list-style-type: none"> <li>• physical examination for work-related dermatitis</li> <li>• standardised respiratory function tests.</li> </ul> <p>A registered medical practitioner may choose to assess isocyanate exposure by a urinary isocyanate metabolite level test.</p>
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Remove products containing isocyanates</p> <p><b>Engineering</b> Ventilation Enclosure/segregation</p> <p><b>Administration</b> Chemalert – SDS Baseline monitoring before starting work with isocyanates Chemical approval – Chemical Coordinator Servicing and inspection – maintenance program Monitoring – records, health surveillance Incident management – SAP Housekeeping Signage/labelling</p> <p><b>PPE</b> Nitrile or neoprene gloves</p>

Isocyanates	
	Splash proof goggles Type A respirator

### 11.3.15 Lighting

Lighting	
<b>Overview</b>	The simplest interpretation of providing lighting to a visual task is to provide 'light' i.e. illuminance. Illuminance is not the only solution to a lighting problem. While the provision of sufficient illuminance on the task is a necessary element, in many instances task visibility depends heavily on the way in which the light is applied. Critical factors are the luminance contrast of the task and luminance adaptation level of the observer. Creation of the comfortable visual conditions which people require to maintain efficiency over a period of time depends on factors such as the distribution of light throughout the space; the use of suitable colours and finishes on relevant reflecting surfaces; the choice of luminaires with adequate glare control; and the elimination of unwanted reflection. These factors produce 'good quality lighting'. Experience has shown that when inefficiency, eye fatigue, spoilt work or accidents are blamed on the lighting system, failure to meet one or more of the 'quality' recommendations is often a significant part of the problem.
<b>Source</b>	Natural lighting Artificial lighting
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	Eye strain, headache
<b>Monitoring Requirements</b>	Lighting survey (in line with AS1680 - Interior and workplace lighting) (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Perform tasks in daylight hours if precision is required and artificial light is not suitable</p> <p><b>Engineering</b> Lighting maintenance program</p> <p><b>Administration</b> Lighting survey – records Defect management Housekeeping Supervision Job planning Lighting plants, additional lighting</p> <p><b>PPE</b> Clean safety glasses</p>

### 11.3.16 Mould

Mould	
<b>Overview</b>	<p>Mould is part of a group of very common organisms called fungi that also include mushrooms and yeast. It is present virtually everywhere, both indoors and outdoors.</p> <p>Mould may grow indoors in wet or moist areas lacking adequate ventilation, including walls/wallpaper, ceilings, bathroom tiles, carpets (especially those with jute backing), insulation material and wood. If moisture accumulates in a building mould growth will often occur. Many different types of mould exist and all have the potential to cause health problems.</p> <p>Moulds growth may result in greater numbers of spores, cell fragments, allergens, mycotoxins, endotoxins, <math>\beta</math>-glucans and volatile organic compounds in indoor air. The causative agents of adverse health effects have not been identified conclusively, but an excess level of any of these agents in the indoor environment is a potential health hazard.</p>

Mould	
	<p>Microbial growth requires:</p> <ul style="list-style-type: none"> <li>• Moisture (direct or in air)</li> <li>• Nutrients (paper, cellulose, wood, dust etc)</li> </ul> <p>Growth is assisted by:</p> <ul style="list-style-type: none"> <li>• Darkness (limited UV light)</li> <li>• Limited air movement</li> <li>• Humidity (over 80%) and warm temperature (between 5 and 38°C)</li> </ul> <p>Symptoms caused by mould allergy may include: respiratory illness or asthma, watery, itchy, red eyes, chronic cough, headaches or migraines, rashes (dermatitis), tiredness, sinus problems, blocked nose, frequent sneezing.</p>
<b>Source</b>	<p>Old paper records, archives</p> <p>Damp, moist areas, water leaks</p>
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	Allergic or toxic respiratory responses, neurological effects
<b>Monitoring Requirements</b>	Mould inspections
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b> Ventilation – cleaning air conditioning filters</p> <p><b>Administration</b> Cleaning – detergents, bleach Hygiene practises – hand washing Reduce dampness Maintenance – defect management</p> <p><b>PPE</b> Respirator – spores Safety glasses</p>

### 11.3.17 Nitrogen Dioxide

Nitrogen Dioxide	
<b>Overview</b>	<p>Nitrogen dioxide is a gas produced from combustion processes and explosive blasting. Chronic exposure can result in the development of an asthma-like condition called RADS (Reactive Airways Dysfunction Syndrome) where small air passages react (constrict and narrow) to any irritant. (chemicals, cigarette smoke, even cold air) may cause an asthma attack. Other effects from chronic exposure may include obliterative bronchiolitis where the small air passages (bronchioles) are scarred and become distorted &amp; blocked, reducing lung function and limiting exercise ability.</p> <p>Acute exposure to high concentrations can result in eye irritation – stinging and watering; Throat irritation – pungent smell, stinging nose &amp; coughing; Lung irritation – coughing, wheezing and tight chest – difficulty breathing; NO<sub>2</sub> can trigger asthma in asthmatics. A serious condition resulting from acute exposure is delayed pulmonary oedema, a medical emergency where lungs fill with fluid.</p>
<b>Source</b>	Welding (confined spaces – more concentrated)

Nitrogen Dioxide	
<b>Exposure Standard</b>	TWA (8hr) 5.6 mg/m <sup>3</sup> STEL (15 minute) 9.4 mg/m <sup>3</sup>
<b>Health Effects</b>	Respiratory irritant, tissue corrosion, pulmonary oedema (may be delayed)
<b>Monitoring Requirements</b>	Portable gas detectors, Nitrogen dioxide monitors
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b>            Ventilation            Designated welding areas/booths</p> <p><b>Administration</b>            Risk assessment – 2x2, JSEA            Trained and competent welders            Supervision            Chemical approval – Chemical Coordinator            Chemsafe – SDS            Chemical register</p> <p><b>PPE</b>            Welding PPE – face shield, gauntlets, boots, apron, welding particulate respirator</p>
<b>References</b>	Welding Processes Code of Practice 2013

### 11.3.18 Noise

Noise	
<b>Overview</b>	<p>The effects of exposure to noise in the work environment may cause several physiological and psychological responses. Noise can:</p> <ul style="list-style-type: none"> <li>• Cause hearing loss</li> <li>• Annoy and interfere with speech</li> <li>• Interfere with concentration and thought processes</li> <li>• Disturb sleep</li> <li>• Cause fatigue and aggression</li> <li>• Reduce immune response</li> <li>• Lead to heart attack</li> </ul> <p>When noise induced hearing loss occurs, the hair cells in the inner ear are damaged beyond repair.</p> <p>In general, exposure to noise in the work environment and non-working environment continues to rise, and, if not managed will result in occupational noise induced hearing loss (NIHL). Hearing loss is usually cumulative and increases with exposure – length of time exposed and level of noise. It is a common health problem, which can be difficult to detect as the effects build up gradually over time.</p> <p>Exposure to some chemical substances and some medications can also cause hearing loss or make the effects of hearing loss worse.</p> <p>Exposure to hand transmitted vibrations can also worsen the effects of noise on hearing.</p>
<b>Source</b>	Noise emissions from plant and equipment

Noise	
<b>Exposure Standard</b>	<p><b>WHS Regulation s56 Meaning of exposure standard for noise</b>            (1) In this regulation, exposure standard for noise, in relation to a person, means—            (a) LAeq,8h of 85 dB(A); or            (b) LC,peak of 140 dB(C).</p>
<b>Health Effects</b>	Progressive hearing loss
<b>Monitoring Requirements</b>	Personal Noise Dosimetry (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Elimination</b> Eliminate the noisy machine or process</p> <p><b>Substitution</b> Substitute noisy machine or process with a quieter one Change the way the job is done (with quieter practises e.g. not hammering)</p> <p><b>Engineering/Redesign</b> Plant &amp; Equipment Specifications – operator noise exposure &lt; 85 dB(A) (12 hour day) – separation of person through distance or from people Equipment and plant design – noise dampeners, mufflers, silencers Maintenance strategies Enclosed cabins and offices</p> <p><b>Administration</b> Risk identification and assessment (risk register), control and monitoring Job rotation Health Exposure Assessment Noise Monitoring Records Plant modification – Noise Considerations Hearing Conservation Program, education and training Health Surveillance - Audiometry Signage Hearing Protection Fit Testing Education, information and training Noise maps Cost benefit analysis for noise control options Maintenance and storage of hearing protection devices</p> <p><b>PPE</b> Hearing protection devices - Ear plugs</p>
<b>References</b>	AS/NZS 1269.1:2005 Occupational Noise Management NOHSC:1007 (2000) National standards for occupational noise exposure Code of Practice Managing Noise and Preventing Hearing Loss at Work 2011

### 11.3.19 Refined Hydrocarbons

Refined Hydrocarbons	
<b>Overview</b>	Refined hydrocarbon based substances such as lubricating oils, fuels and greases can have either a dermal exposure or an inhalation exposure depending on their volatility. The effects of inhalation exposure may include; lethargy, headache, incoordination, decreased mental aptitude, breathlessness, nausea and vomiting. Dermal exposures can result in drying, cracking and reddening of the skin resulting in dermatitis, the severity of which is dependent on the duration and individual susceptibility.
<b>Source</b>	Coatings, lubricants (oils, fuels and greases) and sealants

Refined Hydrocarbons	
<b>Exposure Standard</b>	Diesel fuel 100mg/m <sup>3</sup> Benzene 3.2 mg/m <sup>3</sup>
<b>Health Effects</b>	Central nervous system effects, dermatological effects
<b>Monitoring Requirements</b>	(refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b>            Isolation            Ventilation</p> <p><b>Administration</b>            Risk assessment – 2x2, JSEA            Supervision            Chemical approval – Chemical Coordinator            Cheralert – SDS            Chemical register</p> <p><b>PPE</b>            Splash proof goggles            Nitrile gloves</p>

### 11.3.20 Respirable Dust

Respirable Dust	
<b>Overview</b>	<p>Dusts are airborne solid particles. Dust is generated during grinding, crushing or chipping of hard materials or from the mechanical dispersion of fine powders.</p> <p>If particles are sufficiently small that they may be breathed in and reach the narrowest airways of the lung, they are termed respirable. Respirable particles are generally smaller than 10 micrometres. (One micrometre is one millionth of a metre).</p> <p>Occupational exposure to respirable coal dust is responsible for the development of progressive lung disease, reductions in lung function and exercise capability. The disease most commonly associated with excessive exposure to respirable coal dust is Coal Workers pneumoconiosis (CWP). This is characterised by the radiographic appearance of small (1-2mm) discrete opacities in the lung. People with this condition are at increased risk of developing Progressive Massive Fibrosis (PMF), characterised by the presence of larger dark opacities with damage to surrounding structures of the lung. The development of PMF is associated with significant impairment of ventilatory capacity and hypoxaemia on exertion. Patients with PMF are at significant risk of premature mortality.</p> <p>There is evidence that long-term exposure to many dusts previously considered inert can contribute to chronic obstructive airways disease (COAD), or chronic obstructive pulmonary disease (COPD).</p>
<b>Source</b>	Coal dust
<b>Exposure Standard</b>	TWA (8hr) 2.5mg/m <sup>3</sup>
<b>Health Effects</b>	Respiratory Irritation (Dust) Occupational Asthma Coal Workers Pneumoconiosis (Coal Dust and Quartz) Progressive Massive Fibrosis (Dust) Chronic Obstructive Airways Disease (Dust)

Respirable Dust	
<b>Monitoring Requirements</b>	Personal dust monitoring (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Process automation</p> <p><b>Engineering</b> Isolation Ventilation Enclosure and segregation Dust suppression Air-conditioned cabins</p> <p><b>Administration</b> Servicing and inspection – maintenance program Monitoring – records, health surveillance Incident management – SAP Housekeeping Chemalert – SDS Signage</p> <p><b>PPE</b> Respiratory Protection – P2 or P3 respirators, airfed helmets</p>
<b>Reference</b>	AS2985-2009 Workplace atmospheres – Method for sampling and gravimetric determination of respirable dust

### 11.3.21 Sulphuric Acid and Mist

Sulphuric Acid and Mist	
<b>Overview</b>	<p>IARC have classified mists containing strong inorganic acids as Group 1 - carcinogenic to humans. There is sufficient evidence in humans for the carcinogenicity of mists from strong inorganic acids to cause cancer of the larynx.</p> <p>Non-cancer effects associated with chronic exposure to sulphuric acid are chronic cough and dental erosion. Acute exposure to acid mists is irritating to mucous membranes of the eyes, nose and respiratory tract. Localised pain, oedema and tissue damage is present, there may be difficulty breathing due to bronchospasm.</p>
<b>Source</b>	<p>Bulk tank storage – diluted for use in Demineralisation Plant</p> <p>Cooling Towers – maintain PH levels</p>
<b>Exposure Standard</b>	TWA (8hr) 1 mg/m <sup>3</sup>
<b>Health Effects</b>	<p>Skin, eye and respiratory system irritant, possible burns</p> <p>Respiratory tract cancer, acute tissue damage</p>
<b>Monitoring Requirements</b>	(refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b> Eliminate use of sulphuric acid</p> <p><b>Engineering</b> Ventilation</p> <p><b>Administration</b> Chemalert – SDS Storage Chemical Approval process – Chemical Coordinator</p>

Sulphuric Acid and Mist	
	Risk Management <b>PPE</b> Splash proof goggles PVC or rubber gloves Coveralls Type B respirator

### 11.3.22 Synthetic Mineral Fibres

Synthetic Mineral Fibres	
<b>Overview</b>	<p>Dust from glasswool and rockwool products may cause irritation, tickling and dryness of the nose, throat and respiratory tract, especially for those who suffer hay fever, asthma or bronchitis. The most noticeable effect from exposure to SMF is temporary skin irritation, particularly where there is rubbing from clothing such as cuffs and collars; and irritation to eyes and mucous membranes if exposure is significant.</p> <p>IARC have classified SMFs as;</p> <ul style="list-style-type: none"> <li>• Glasswool - Category 3 - not classifiable as carcinogenic to humans</li> <li>• Rockwool - Category 3 - not classifiable as carcinogenic to humans</li> <li>• Refractory Ceramic Fibres (high temperature applications) classified as Category 2B - possibly carcinogenic to humans.</li> </ul> <p>Since 2000 – 2002, all glass and rockwool insulation products manufactured in Australia have been biosoluble, allowing the product to dissolve in bodily fluids and be quickly cleared from the lungs.</p>
<b>Source</b>	Insulation materials (electrical, insulation batts)
<b>Exposure Standard</b>	TWA 0.5 f/ml (high biopersistent fibres only) TWA 2 mg/m <sup>3</sup> for all fibre types
<b>Health Effects</b>	Irritation of skin and mucous membranes
<b>Monitoring Requirements</b>	Air sampling (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>            Remove products containing SMFs</p> <p><b>Engineering</b>            Isolation</p> <p><b>Administration</b>            Personal hygiene            Air sampling            Chemalert –SDS            Housekeeping - cleaning            Storage            Risk assessment – JSEA</p> <p><b>PPE</b>            Respirator (?)            Safety goggles            Gloves</p>

### 11.3.23 Thermal Stress

Thermal Stress	
<b>Overview</b>	<p>The thermal environment can have a significant effect on people. Most commonly seen as acute exposures, heat can produce a spectrum of effects dependent on exposure:</p> <ul style="list-style-type: none"> <li>• Heat rashes are tiny red spots on the skin which cause a prickling sensation during heat exposure.</li> <li>• Heat cramps are sharp pains in the muscles that may occur alone or be combined with one of the other heat stress disorders.</li> <li>• Heat exhaustion consisting of symptoms including: heavy sweating, weakness, dizziness, intense thirst, nausea, headache, vomiting, diarrhoea, muscle cramps, breathlessness, palpitations, tingling and numbness of the hands and feet.</li> <li>• Heat syncope is heat-induced dizziness and fainting induced by temporarily insufficient flow of blood to the brain while a person is standing.</li> <li>• Heat stroke is the most serious type of heat illness. Signs of heat stroke include body temperature often greater than 41°C, and complete or partial loss of consciousness.</li> </ul> <p>Heat stress occurs when heat is absorbed from the environment faster than the body can get rid of it. Several factors may contribute to heat stress, such as the type of work activity, the surrounding air temperature/humidity level, and the physical condition of the individual.</p> <p>The human body maintains a fairly constant internal temperature even though it may be exposed to varying environmental temperatures. To keep internal body temperatures within safe limits in hot conditions, the body must get rid of excess heat – and it does this by evaporating sweat and varying the blood flow to the skin. These responses are controlled by the brain and usually occur when the blood exceeds 37 degrees centigrade</p> <p>The outdoor work environment at CS Energy presents a considerable thermal stress hazard in the summer months and the nature of work makes rescheduling to cooler parts of the day difficult. The deployment of conventional heat stress controls (hydration, rest breaks, scheduling) are extremely important.</p>
<b>Source</b>	Heat, sun
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	Acute thermoregulatory injury, heat stress, heat exhaustion, heat stroke
<b>Monitoring Requirements</b>	Temperature monitoring – determine thermal work limit (TWL)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>          Removal of heat source – heat generating equipment          Rotate tasks outside hotter times in the day          Don't work in the direct sunlight</p> <p><b>Engineering</b>          Install heat shields          Cool air conditioning</p> <p><b>Administration</b>          Cool drinking water          Risk assessments – 2x2, JSEA, Basic heat stress risk assessment          Acclimatisation          Hydration testing</p> <p><b>PPE</b>          Sun shades, sunscreen          Hard hat brims</p>

Thermal Stress	
	Provide shaded areas

### 11.3.24 Ultraviolet (UV) Radiation

Ultraviolet (UV) Radiation	
<b>Overview</b>	<p>Solar radiation is a known occupational carcinogen (for outdoor workers) associated with increased risk for malignant melanoma and other skin cancers. The Australian population has the highest rate of skin cancer in the world. There is growing evidence that sun exposure later in life continues to add to the risk of developing melanoma. The incidence of melanoma increases with age much more in men after 40–50 years of age and it is more than double in men than in women after 70 years of age.</p> <p>There is a 1 in 14 risk of being diagnosed with invasive melanoma by age 85. Workers &gt;40 years old are at higher risk than younger workers. Acute exposure to UV radiation can also cause photokeratoconjunctivitis (welder's flash), cataracts, skin burns, and both photo irritant and photo allergic contact dermatitis (PICD and PACD).</p>
<b>Source</b>	<p>Working outdoors, direct sun</p> <p>Welder's flash</p>
<b>Exposure Standard</b>	N/A
<b>Health Effects</b>	Skin cancer, acute skin burns, cataracts
<b>Monitoring Requirements</b>	Campaign style exposure assessment
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p>Rotate tasks outside hotter times in the day</p> <p>Don't work in the direct sunlight</p> <p><b>Engineering</b></p> <p><b>Administration</b></p> <p>Bureau of Meteorology – UV intensity</p> <p>Regular skin checks</p> <p>Education and awareness</p> <p><b>PPE</b></p> <p>Sun shades, sunscreen</p> <p>Hard hat brims</p> <p>Provide shaded areas</p>

### 11.3.25 Volatile Organic Compounds (VOCs)

Volatile Organic Compounds (VOCs)	
<b>Overview</b>	<p>Volatile Organic Compounds (VOCs) are a large group of carbon-based chemicals that easily evaporate at room temperature, they are commonly encountered in solvents, adhesives and coatings. Some common examples include Acetone, Trichloroethylene, Solvent Naphthas, and Xylenes.</p> <p>Common short-term symptoms of exposure to VOCs include: eye, nose and throat irritation, headaches, nausea and dizziness. Long-Term effects of high levels of VOCs may increase the risk of cancer, liver, kidney and central nervous system damage.</p>
<b>Source</b>	<p>Penetr8 (corrosion protection) Lanotec (welding)</p> <p>Moulds can release VOCs</p> <p>Electrical cleaning substances</p>

Volatile Organic Compounds (VOCs)	
<b>Exposure Standard</b>	Varies (depending on the compound)
<b>Health Effects</b>	Central nervous system effects, systemic organ effects
<b>Monitoring Requirements</b>	(refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b>            Segregation of tasks</p> <p><b>Administration</b>            Personal hygiene            Air sampling            Chemsafe – SDS            Housekeeping - cleaning            Storage            Risk assessment – JSEA</p> <p><b>PPE</b>            Splash proof goggles            Nitrile or neoprene gloves</p>

### 11.3.26 Welding and Metal Fumes

Welding and Metal Fumes	
<b>Overview</b>	<p>There are about 20 major types of welding processes used on 10 major classes of materials, and hence an extremely wide range of work environments are possible.</p> <p>MMAW and GMAW are the two most common types of welding used. In general, the five combinations MMAW/mild steel, MMAW/stainless steel, GMAW/mild steel, GMAW/stainless steel and GMAW/aluminium account for 60 to 70 per cent of all welding activity.</p> <p>Acute exposure to freshly generated welding fumes can produce effects similar to influenza lasting 24-48 hours. Metal fume fever is usually linked to welding or hot work on galvanised metals. High exposures to mild steel weld fume can also cause this illness. Metal fume fever does not usually have any lasting ill effects.</p> <p>Gases and fine particles in welding fume can cause dryness of the throat, tickling, coughing or a tight chest. The effects tend to be short lived. Ozone is a particular cause of this when GTAW welding stainless steels and aluminium. High exposures to nitrous oxides (generated during most arc welding operations) can also cause this health effect.</p> <p>Welding fume is internationally classified as possibly carcinogenic to humans (IARC classification group 2B). Although primarily associated with stainless steel welding, this classification is not limited to stainless steel fume. Overall lung capacity and peak flow are affected by prolonged exposure to welding fume. The effects tend to get worse through the working week but gradually improve when not exposed.</p> <p>In addition to welding fume and gases other toxic fumes, smoke and gases may be evolved by heating paint, plastics and other metal coatings during welding or hot work.</p> <p>Acute poisoning due to excess exposure or severe short term exposure to one or more welding fumes or gases has been documented. However, other than lung involvement, that is, mainly respiratory irritation and related effects, few chronic, long term effects have been directly attributed to welding fumes and gases. Due to the presence of chromium, nickel and aluminium, there is concern about the effects of chronic exposure on special groups such as welders of stainless steel and aluminium.</p>
<b>Source</b>	Welding activities and welding materials e.g. electrodes

Welding and Metal Fumes	
<b>Exposure Standard</b>	TWA 5mg/m <sup>3</sup> *Individual metals and gases depending on the type of welding, the welding consumable and the parent metal
<b>Health Effects</b>	Varies depending upon type of welding and consumables used; however, commonly acute febrile illness, chronic bronchitis, cough
<b>Monitoring Requirements</b>	Campaign style exposure assessment (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b></p> <p><b>Engineering</b> Ventilation Designated welding areas, booths</p> <p><b>Administration</b> Chemalert – SDS Chemical approval – Chemical Coordinator Personal hygiene Air sampling Housekeeping - cleaning Storage Risk assessment – JSEA</p> <p><b>PPE</b> Welding PPE – face shield, gauntlets, boots, apron, welding particulate respirator</p>
<b>References</b>	Welding Processes Code of Practice 2013

### 11.3.27 Whole Body Vibration

Whole Body Vibration	
<b>Overview</b>	<p>Vibration arises from various mechanical sources with which humans have physical contact. Vibration energy can be passed on to operators from vehicles on rough roads; vibrating machinery; or vibrating work platforms and may give rise to adverse health effects. It can be transmitted through the feet and legs and commonly through the buttocks while seated in a vehicle. The magnitude of the effect of vibration depends on the severity and length of exposures.</p> <p>Whole body vibration (WBV) is the mechanical vibration that when transmitted to the whole body can result in low-back morbidity and trauma of the spine. Studies of long-term exposure to WBV show evidence of risks to health, mainly musculoskeletal disorders involving the lower spine, neck and shoulders. High WBV exposure increases the risk of lower-back pain, herniated discs and early degeneration of the spine.</p> <p>Whole body vibration encountered in earthmoving equipment can constitute a significant exposure, dependent on the nature of the ground, speed and vehicle characteristics.</p>
<b>Source</b>	Earthmoving equipment, forklift operation Mill. Noisy areas
<b>Exposure Standard</b>	<p>No specific limits are set for Australia however, recommendations from Safe Work Australia are to adopt the values contained within Directive 2002/44/EC of the European Parliament and of the Council of 25 June 2002.</p> <ul style="list-style-type: none"> <li>- r.m.s. Acceleration EAV 0.5m/s<sup>2</sup> ELV 1.15m/s<sup>2</sup></li> <li>- VDV EAV 9.1 m/s<sup>1.75</sup> ELV 21 m/s<sup>1.75</sup></li> </ul>
<b>Health Effects</b>	Progressive neurological and orthopaedic disorder

Whole Body Vibration	
<b>Monitoring Requirements</b>	Campaign style exposure assessment – (refer to CS Energy hygiene monitoring schedule)
<b>Control Methods</b>	<p><b>Substitution/Elimination</b>            Replace/substitute vibrating plant (if possible)            Substitute high vibration tools with lower vibration emission levels</p> <p><b>Engineering</b>            Isolating, dampening or cushioning            Provision and maintenance of plant</p> <p><b>Administration</b>            Minimise how long workers use high vibration equipment, on vibrating plant</p> <p><b>PPE</b>            Suitable boots</p>
<b>References</b>	Safe Work Australia – Information sheet – whole body vibration 2015 Safe Work Australia – Guide to measuring assessing whole body vibration 2015 Safe Work Australia – Guide to managing risks of exposure to whole body vibration 2015 AS2670 Evaluation of human exposure to whole body vibration Code of Practice - Managing risks of plant in the workplace 2013